

# 2005 CONNECTICUT STATE BUILDING CODE

TABLE 1106.1 TABULATES THE MINIMUM NUMBER OF SPACES REQUIRED

CONNECTICUT GENERAL STATUTES  
14-253A(H)  
10-01-04


SECTION 1106.5 SPECIFIES HOW MANY OF THESE ACCESSIBLE SPACES ARE REQUIRED TO BE VAN ACCESSIBLE SPACES  
NOTE, IF ONLY ONE ACCESSIBLE SPACE IS REQUIRED, IT SHALL BE A VAN ACCESSIBLE SPACE

SECTION 1106.2 -1106.4 INCREASES THIS NUMBER BASED UPON OCCUPANCY

MEDICAL OUTPATIENT FACILITIES 10% OF TOTAL

SPECIALTIES TREATING PATIENTS WITH MOBILITY IMPAIRMENTS 20% OF TOTAL  
SECTION 1106.5/1106.5.1 CALLS OUT MINIMUM NUMBER OF VAN SPACES ( 1 FOR EVERY 6 )

SEE SECTION 1106.2 FOR GROUPS R2 & R3

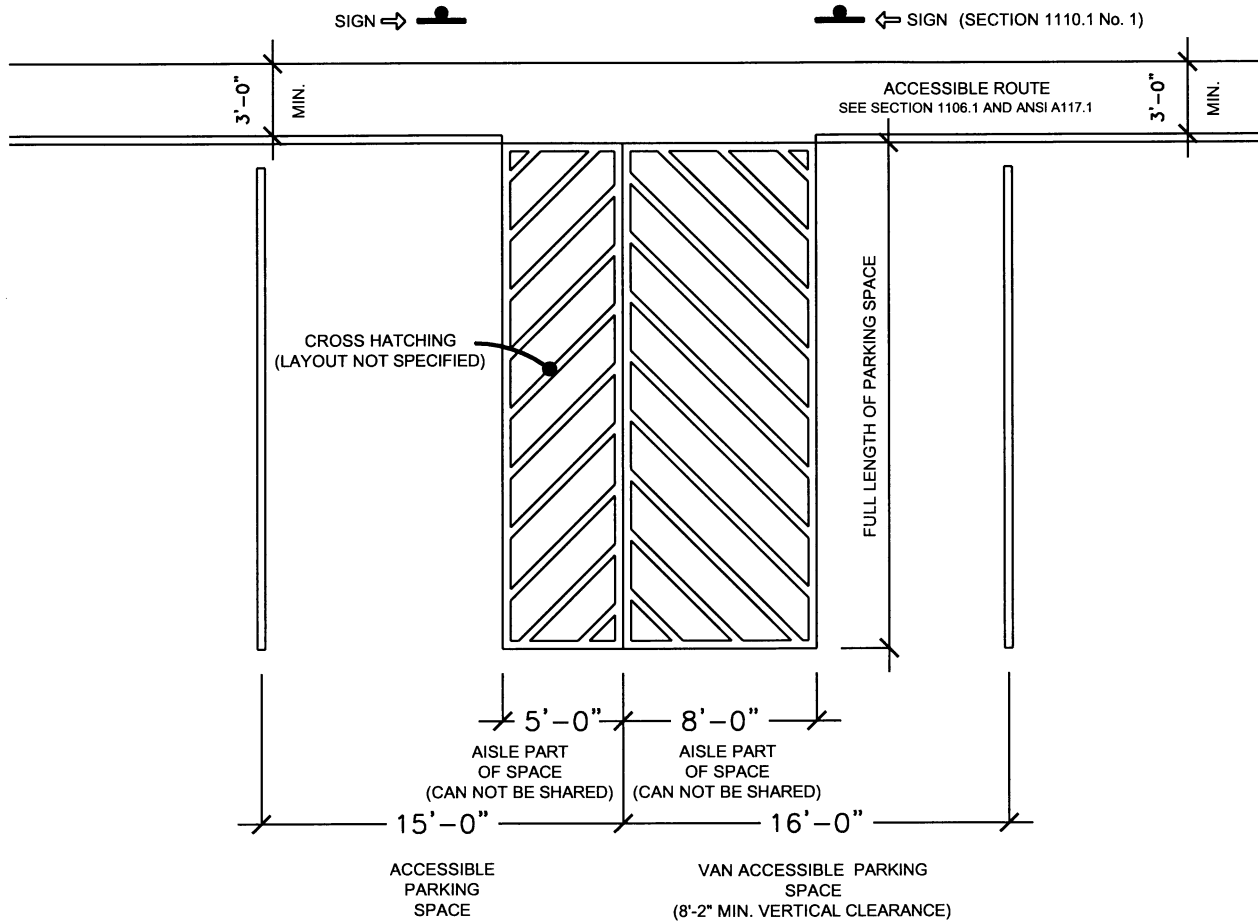

## PLAN - TYPICAL ACCESSIBLE PARKING SPACE AND VAN ACCESSIBLE PARKING SPACE

DATE DRAWN: MARCH 23, 2006

DRAWN BY: C. BARAN

SCALE: 1/8" = 1'-0"

ACCESSIBLE PARKING SPACES SHALL HAVE A SURFACE WITH A GRADIENT NOT MORE THAN ONE UNIT VERTICAL TO 50 UNITS HORIZONTAL (1:50), PER ANSI A117.1 (2003) SECTION 502.5 AS AMENDED BY 2005 CONNECTICUT STATE BUILDING CODE

SECTION 1110.1 No. 1: PARKING SPACES SHALL BE IDENTIFIED BY ABOVE-GRADE SIGNS, WHITE LETTERING ON BLUE BACKGROUND. IT SHALL INCLUDE THE INTERNATIONAL SYMBOL OF ACCESSIBILITY AND THE TEXT, "HANDICAPPED PARKING PERMIT REQUIRED" "VIOLATORS WILL BE FINED" AND INDICATE THE MINIMUM FINE AMOUNT

CROSS HATCHED PORTIONS SHALL NOT BE SHARED BETWEEN SPACES



### DISCLAIMER

THIS DIAGRAM IS INTENDED ONLY AS A GUIDE  
BRUCE J. SPIEWAK DOES NOT WARRANT  
THAT THIS DIAGRAM WILL ENSURE CODE  
COMPLIANCE IN ANY SPECIFIC INSTALLATION

**BRUCE J. SPIEWAK A.I.A.**  
**CONSULTING ARCHITECT L.L.C.**  
375 MORGAN LANE UNIT 405  
WEST HAVEN, CT 06516  
PH. (203) 931-9945  
FAX (203) 932-2355

**DRAWING: SK - 1**